


R&M SPACEMASTER EX

DOUBLE GIRDER, 4 PART SINGLE
SX5 EX 041...D0

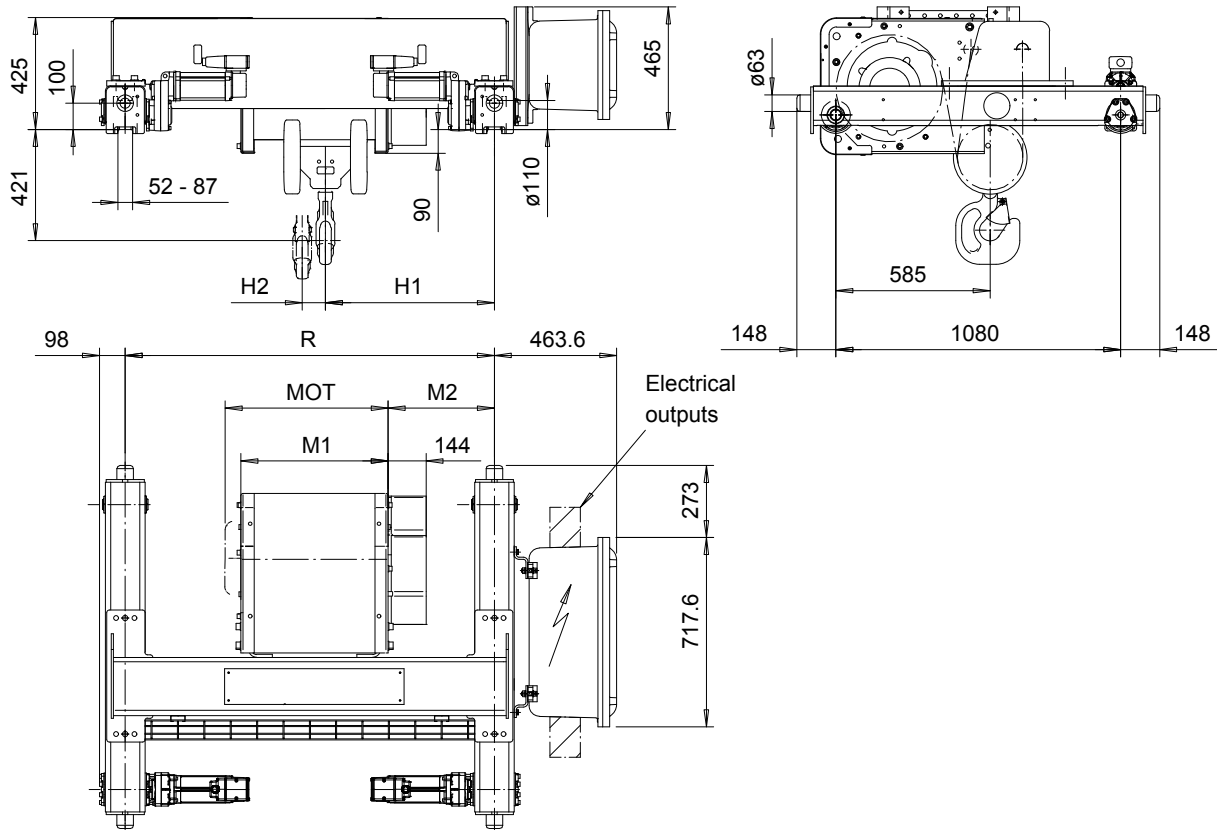

SI-60Hz

Motor	P5	P6
MOT (mm)	578	578
Weight (kg)	58	85

HOL	Length	M1	M2	H1	H2	Min R	Approx Weight
(m)	code	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
9	D	558	403	640	88	1400	770
12	E	678	403	640	118	1400	800
16	F	828	516	753	156	1700	845
20	G	1018	666	903	201	2000	885

Load	Class
(kg)	Fem/ISO
5000	3m/M6
6300	3m/M6
8000	3m/M6
10000	2m/M5

min R is minimum rail gauge when service platform or second brake is supplied.
Standard rail gauges are 1400, 1700 and 2000