


R&M SPACEMASTER EX

DOUBLE GIRDER, 4 PART SINGLE
SX5 EX 041...D0

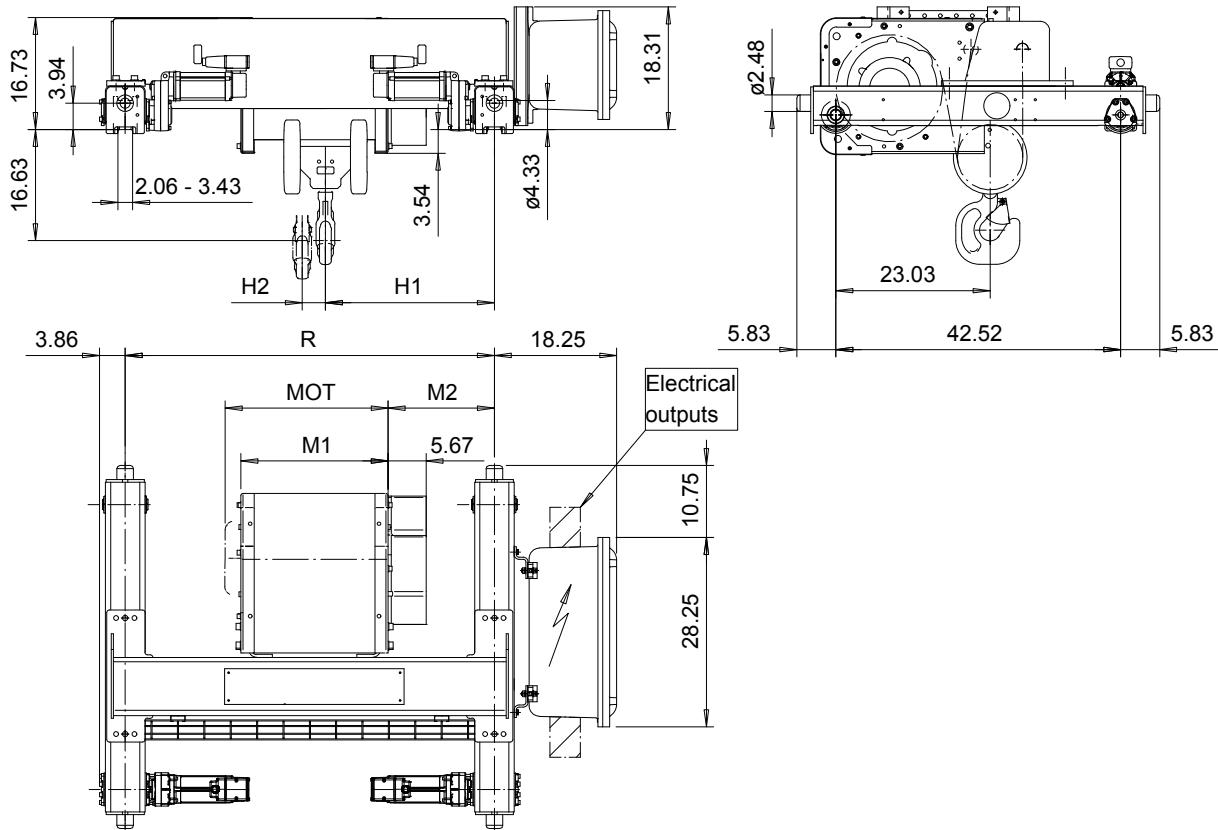

US-60Hz

Motor	P5	P6
MOT (in)	22.76	22.76
Weight (lb)	128	187

HOL (ft)	Length code	M1 (inch)	M2 (inch)	H1 (inch)	H2 (inch)	Min R	Approx Weight (lb)
29'-6"	D	21.97	15.87	25.2	3.46	4'-7 1/8"	1697
39'-4"	E	26.69	15.87	25.2	4.64	4'-7 1/8"	1763
52'-5"	F	32.6	20.31	29.65	6.14	5'-6 7/8"	1862
65'-7"	G	40.08	26.22	35.55	7.91	6'-6 3/4"	1951

Load (ton)	Class ASME
5	H4+
6	H4+
7 1/2	H4+
10	H4

min R is minimum rail gauge when service platform or second brake is supplied.
Standard rail gauges are 55 1/8", 66 15/16" and 78 3/4"