


R&M SPACEMASTER EX

DOUBLE GIRDER, 6 PART SINGLE SX6 EX 061...D0

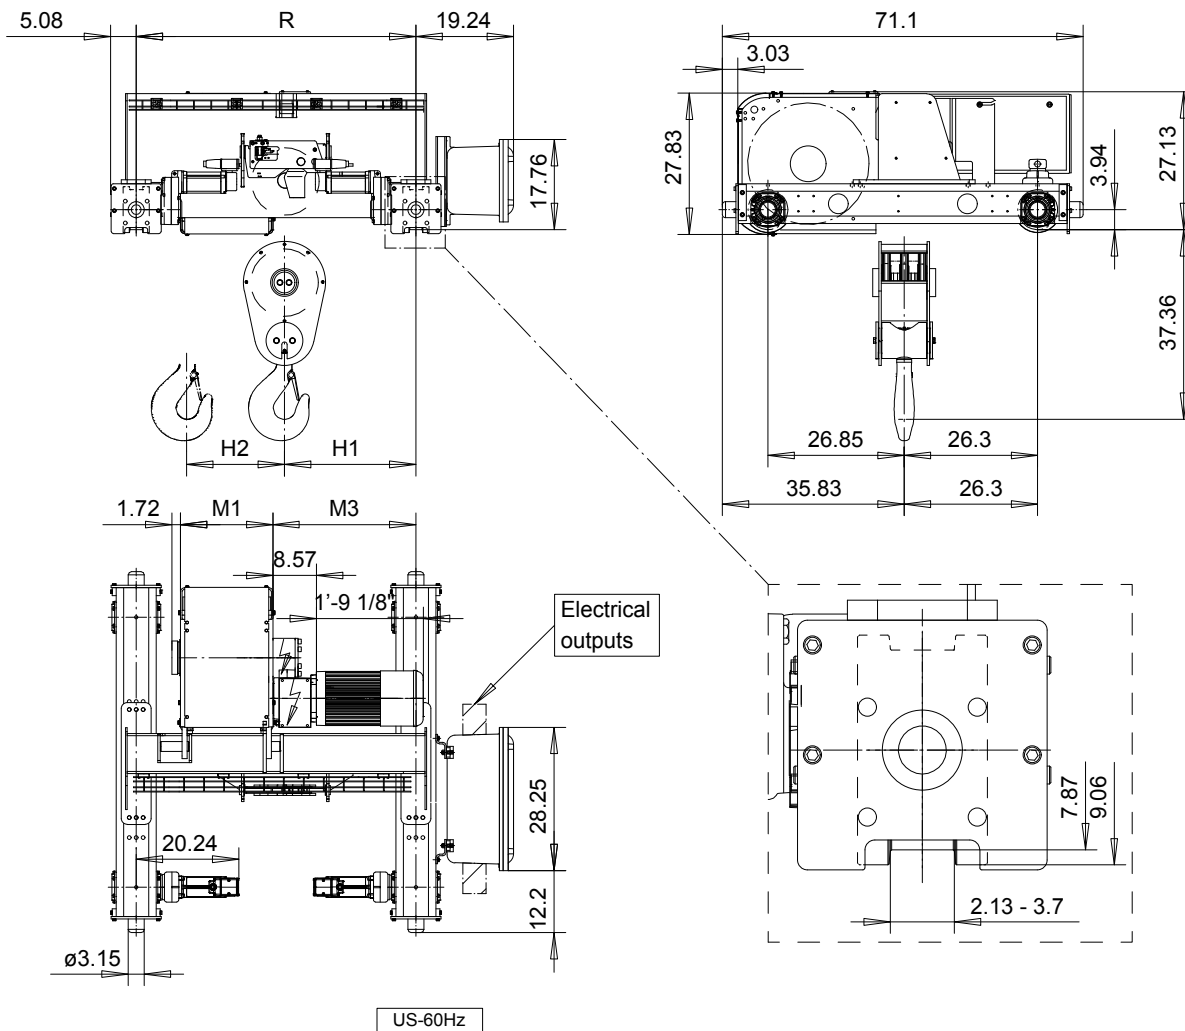

Load (TON)	Class ASME	Hoisting speed (fpm)	
20	H4+	10/1.5	12.5/1.9

HOL (ft-in)	Length code	M1 (in)	M3 (in)	H1 (in)	H2 (in)	min R-max R (in)	Weight (lb)
16'-4"	C	18 3/16	28 3/16	25 15/16	1 13/16	55 1/8	3571
22'-11"	D	22 1/8	31 9/16	29 1/4	2 1/2	66 15/16	3748
29'-6"	E	26 7/8	31 9/16	29 1/4	3 5/16	66 15/16 - 78 3/4	3858
39'-4"	F	32 3/4	37 7/16	35 3/16	4 1/4	78 3/4 - 106 5/16	4079
50'-10"	G	40 1/4	45 5/16	43	5 1/2	94 1/2 - 122 1/16	4387
65'-7"	H	50 1/16	57 15/16	55 5/8	7 3/16	122 1/16 - 149 5/8	4982
86'-11"	J	63 7/8	61 73/16	59 3/16	9 1/2	133 7/8 - 165 3/8	5467
105'-0"	K	75 11/16	76 5/8	74 5/16	11 3/8	165 3/8	6305

min R is minimum rail gauge when service platform is supplied. Weight calculated at minR. Weight increases with longer gauges. Standard rail gauges are 55 1/8", 66 15/16", 78 3/4", 94 1/2", 106 5/16", 122 1/16", 149 5/8", and 165 3/8"

R&M reserves the right to alter or amend the above information without notice