



R&M MATERIALS HANDLING, INC.

Eye suspended (perpendicular version)

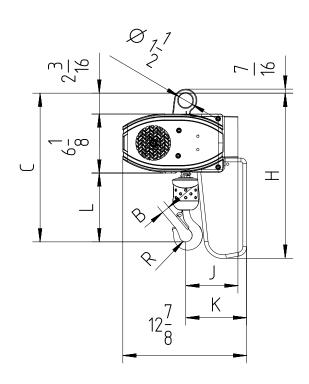

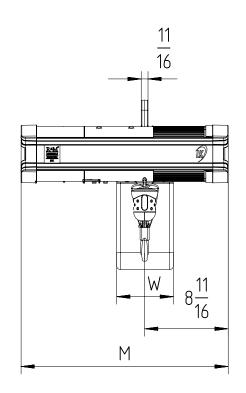

Note: In case of 2-fall hoist, hook suspension is rotated by 180°.

		Falls		Dimensions (inch)										Estimated weight of
Chain Size (mm)			Chain bag capacity (ft)		C		R	J	К	Н	W	М	Weight of chain (lb/ft)	hoist w/o chain (lb)
				В								1ph		1ph
5X14	1 2	1	19	7 8	15 <sup>1</sup> / <sub>2</sub>	7 <sup>1</sup> 8	5 8	2.8 J. 8	6 <u>8</u>	17 1/4	5 <sub>8</sub>	21 <del>5</del>	0.38	97
			52							19 <sup>3</sup> / <sub>4</sub>				
			82							24 <u>1</u>				
	1	2	19 ( <del>×</del> )	1	17 <sup>7</sup> 8	9 <del>5</del>	7 8	4 <sup>7</sup> ( <del>* *</del> )	71/4	17 <del>1</del>				82
			52 ( <del>*</del> )							19 <sup>3</sup> / <sub>4</sub>				
			82 ( <del>*</del> )							24 <u>1</u>				

(\*) In case of 2-fall hoist, available lifting height is half of the chain bag maximum capacity (\*\*) In case of 2-fall hoist, Counter weight is not needed