
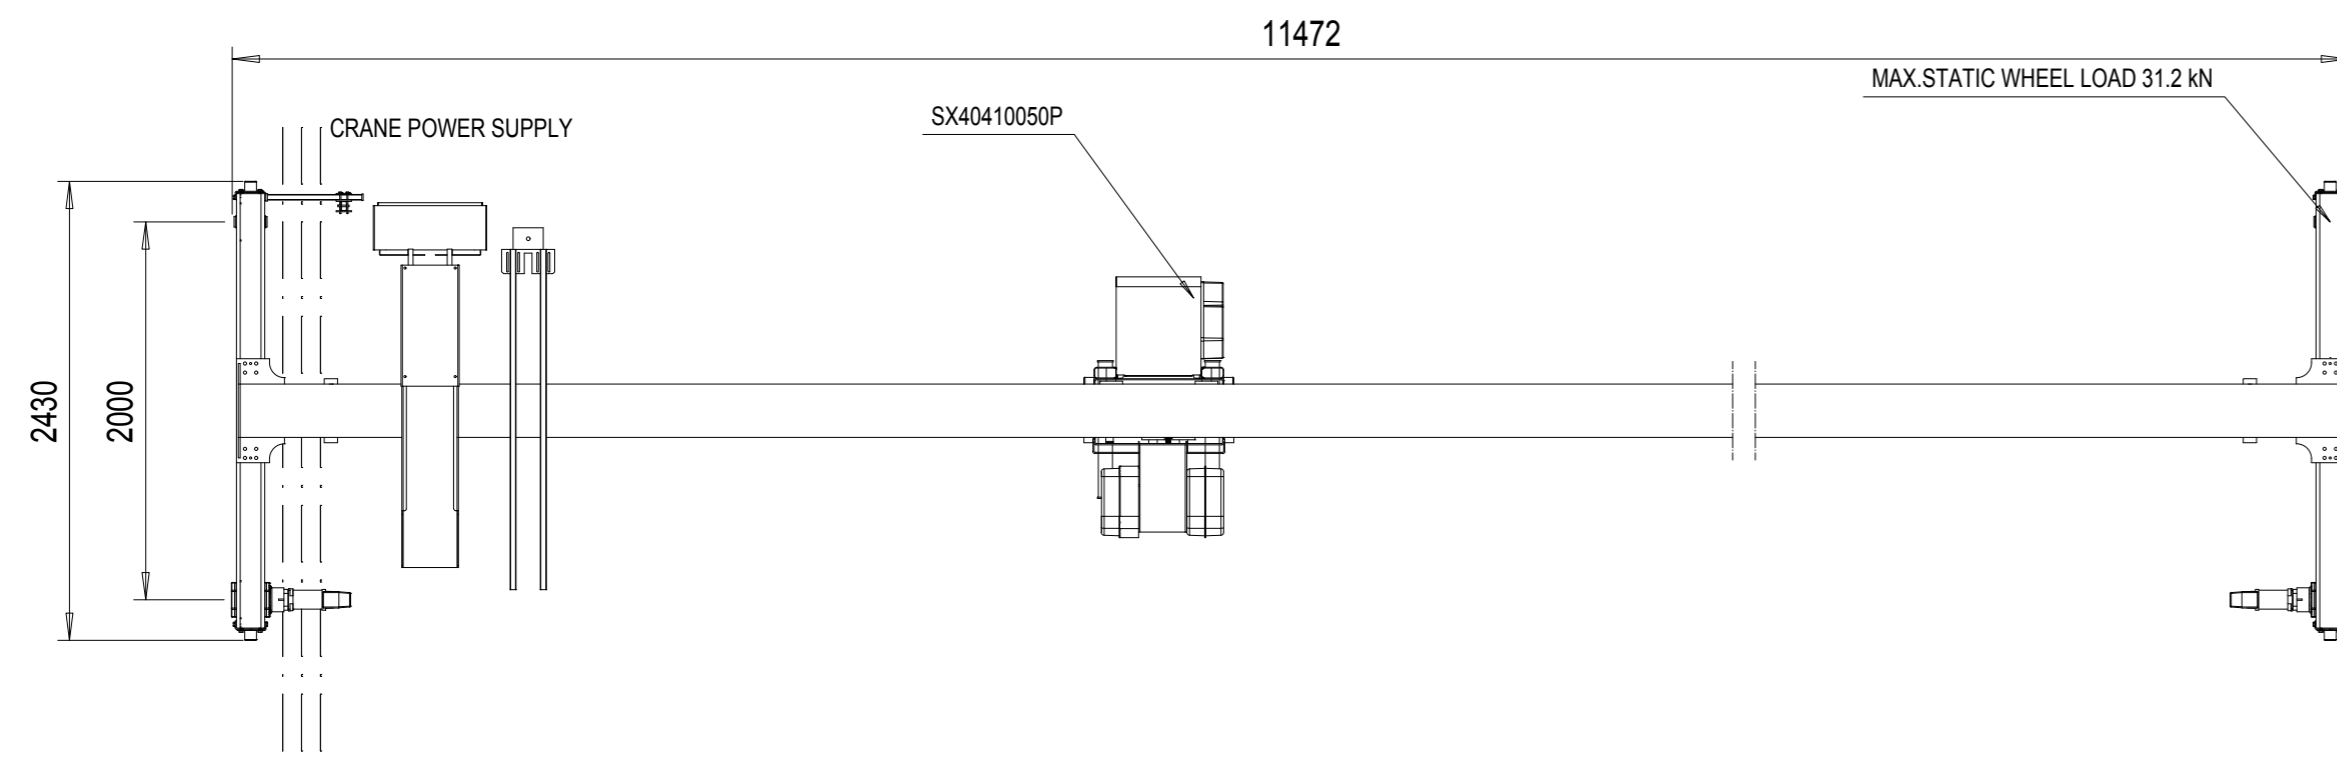


VIEW A-A

SPECIFY NORTH



TECHNICAL DATA

LOAD	: 5000 kg
SPAN	: 11,28 m
LIFTING HEIGHT	: 9 m
HOISTING SPEED	: 6/1 m/min 2-speed
TRAVERSING SPEED	: 20 m/min stepless
TRAVELLING SPEED	: 32 m/min stepless
WEIGHT OF TROLLEY	: 410 kg
WEIGHT OF BRIDGE	: 2170 kg
MAIN/CONTROL VOLTAGE	: 460 / 115 V; 60 Hz
CRANE GROUP	: A3
HOIST GROUP	: FEM M5
CRANE DRIVE GROUP	: FEM M5
SUPPLY POWER	: 6.39 kW
LENGTH OF RUNWAY	: 0 m

SURFACE TREATMENT OF CRANE

BRIDGE COLOR	: Safety Yellow
PAINT	: A/127 µm

Crane tolerances
acc.to drawing CST00A3
Runway tolerances must comply with
standard ISO12488-1 tolerance class 2

CUSTOMER ORGANIZES SAFE
PLATFORM FOR CRANE SERVICE

Indoor Use crane 5°...40° C
Radio controlled crane

ACCEPTED BY:

COMPANY:

DATE:

Pos	Amount	Description	Specification
	GBE/RMS	Design	DAS /2.66.9
	27.03.2015	Date	Vx.proj
	Regional Sales Office Canada	Dept	
QXSk5t x 11.3m Hol:9m			1:40
LM-RXCP5T37-O			M-film
			Issue
			08.58

