


R&M SPACEMASTER EX

LOW HEADROOM, 2 PART SINGLE SX4 EX 021...L0

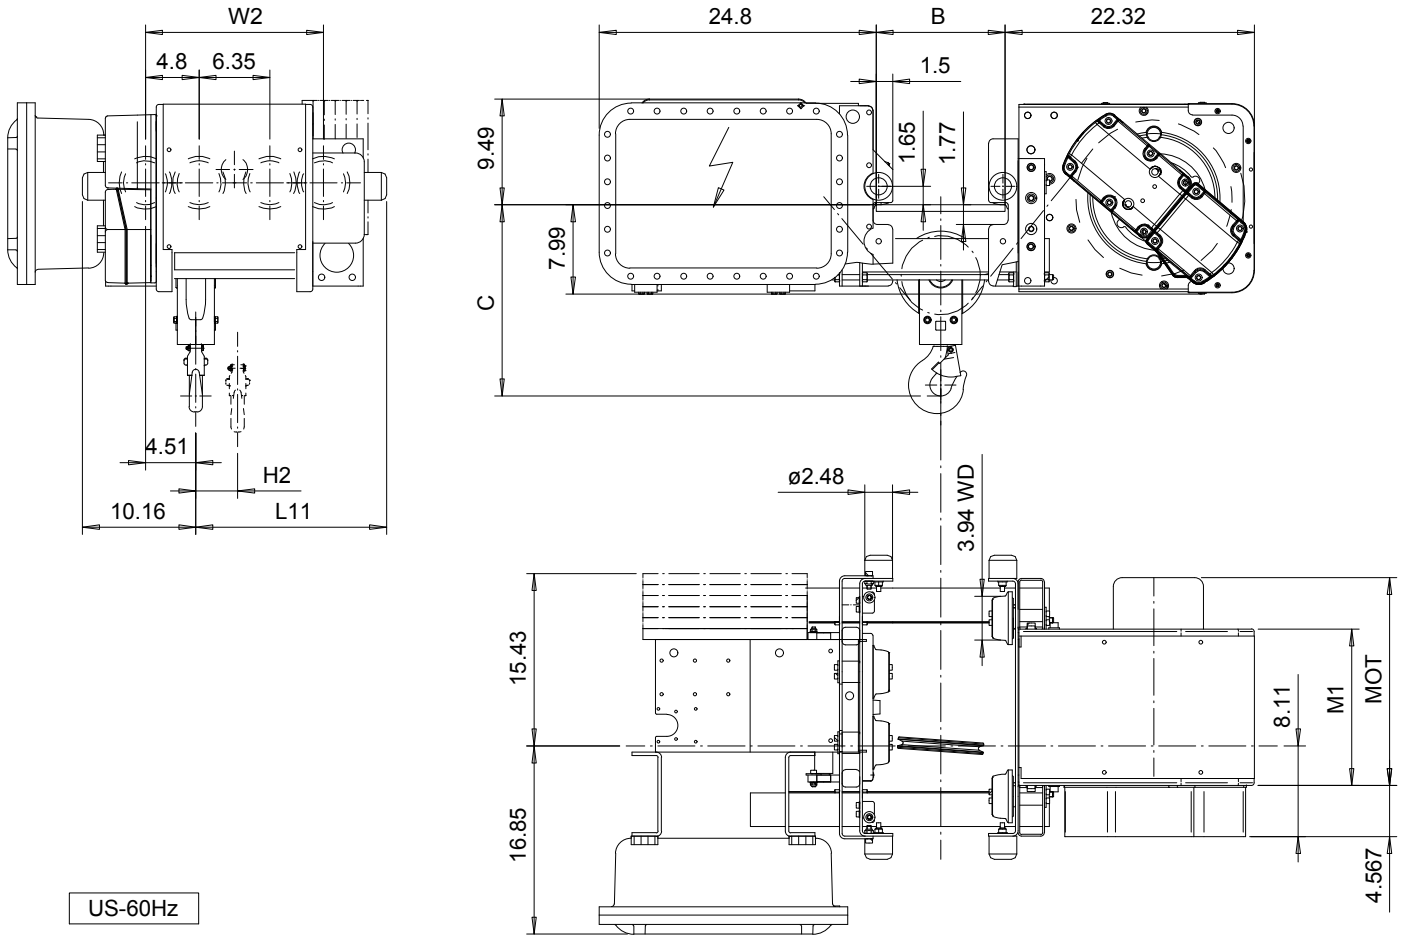

US-60Hz

HEADROOM TABLE	
Flange Width, B (in)	Headroom, C (in)
3.93 - 9.84	17.3
9.88 - 11.81	18.5
11.85 - 13.78	19.9
13.81 - 15.75	21
15.78 - 17.72	22.5
17.75 - 19.3	23.4
Headroom is related to the flange width	

Motor	P2	P3
MOT (in)	17.6	18.7
Weight (lb)	69	77

HOL (ft)	Length code	H2 (inch)	L11 (inch)	M1 (inch)	W2 (inch)	Approx Weight (lb)
39'-4"	B	3.74	13.62	14.03	15.94	834
59'-0"	C	5.66	17.56	17.95	19.88	878
78'-8"	D	7.59	21.5	21.89	23.81	922

Load (TON)	Class ASME
1 1/2	H4+
2	H4+
2 1/2	H4