
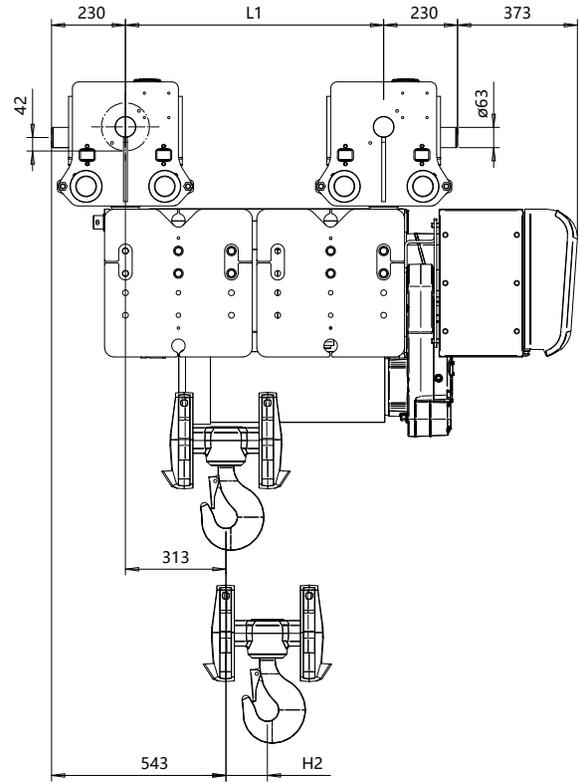


Normal Headroom - for Straight Track, 4 PART SINGLE

Hoist type:

SXR10 041..N

SI

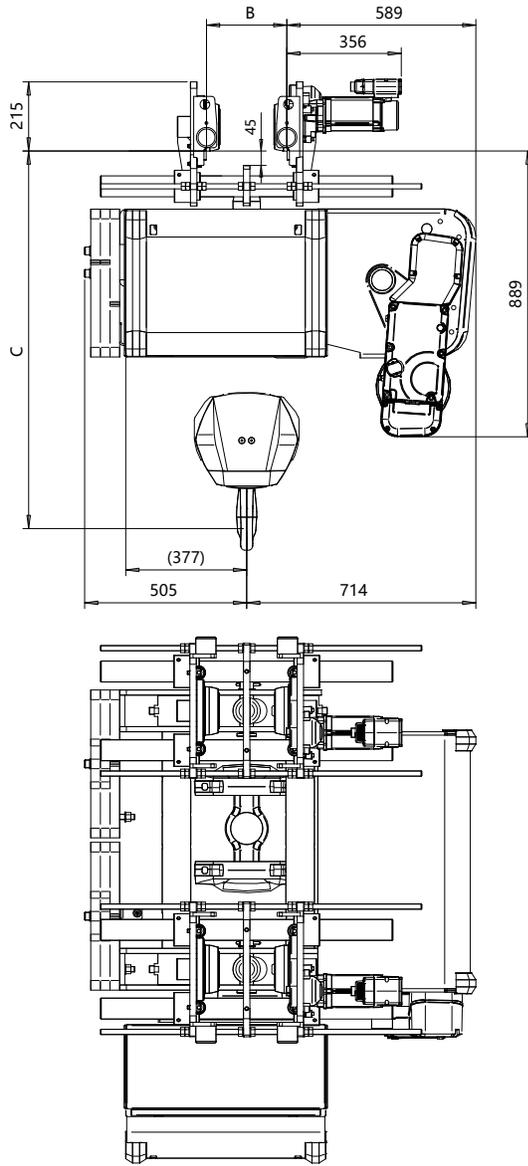

Flange Width B-dimension [mm]	Headroom C-Dimension				
	Case 1 [mm]	Case 2 [mm]	Case 3 [mm]	Case 4 [mm]	Case 5 [mm]
120 - 450	990	1175	1125	1105	1160
Case 1: Steel rope without HS22 limit switch					
Case 2: Steel rope with HS22 limit switch					
Case 3: Steel rope with HS22 L.S. & Rope angle sensor					
Case 4: Synthetic rope with HS22 limit switch					
Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor					
HS22 limit switch mandatory with synthetic rope					

HOL (m)	Length code	H2 (mm)	L1 (mm)	Estimated weight (kg)
9	C	129	804	1061
12	D	173	977	1107
15	E	218	1164	1157

Load (kg)	Class Fem/ISO	Class ASME
8000	3m/M6	H4+
10000	2m/M5	H4
12500	1Am/M4	H3

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-N-04
Date	NORMAL HEADROOM HOIST			1:10 Folder
SLEQMECE Owner Dept	FOR STRAIGHT TRACK			
4 PART SINGLE				Issue 1
R10041_N				

