


# Normal Headroom Hoist EXSX5, REEVING: 022; Class I, Division 2

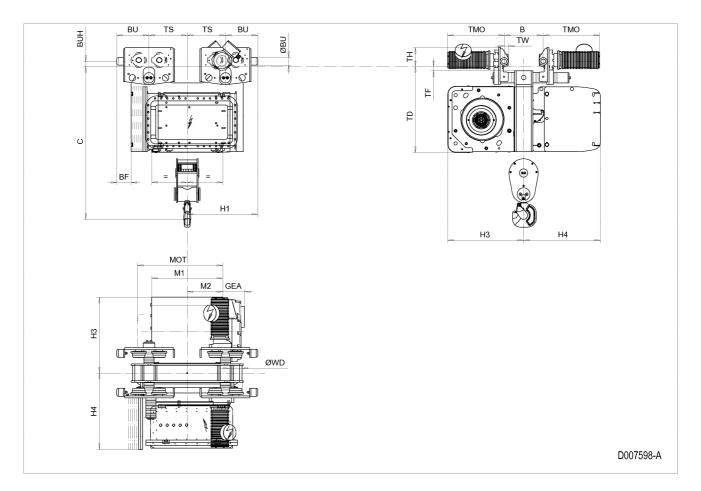

### Hoist dimensions

HOL	Length	M1	M2	H1	H3	H3*	H4	Weight
m	code	mm	mm	mm	mm	mm	mm	kg
8.5	D	558	279	553	595	615	602	899
13	E	678	339	553	595	615	602	924
18	F	828	414	553	595	615	602	955
25	G	1018	509	753	595	615	602	1083
33.5	Н	1268	634	753	595	615	602	1192
46	J	1618	809	753	595	615	602	1293

#### Motor dimensions

Motor	P5	P6	E4	E6
MOT (mm)	578	578	683	683
Weight ( kg)	58	85	145	145

#### Traveling dimensions

Motor	MF06LA
TMO (mm)	400
Weight (kg)	7.8

D007598\_A 252286

## **Trolley dimensions**

B min	B max	С	ØBU	ØWD	BU	BUH	GEA	TD	TF	TH	TW
90	610	1200	63	100	253	40	170	676	35	150	33

## **Trolley dimensions**

Length code	BF	TS
D/E/F	113	300
G/H/J	-77	500

Note: Weight calculated with P5 and MF06LA motors, when B=300 mm. Note: All dimensions in mm.

\* Please, disregard the dimension H3\*.

<sup>78/152</sup> This document and the information contained herein, is the exclusive property of R&M Materials Handling Inc. and represents a non-public, confidential and proprietary trade secret that may not be reproduced, disclosed to third parties, altered or otherwise employed in any manner whatsoever without the express written consent of R&M Materials Handling Inc. Copyright 2018 © R&M Materials Handling Inc. All rights reserved.